


**GYSDUST EXTRACTOR** is a pneumatic dust-extraction unit for sanding dust designed specially for car body repair. The brand new suction system, developed by GYS, combines high suction performance with low air consumption. ATEX certified, this appliance is suitable for aluminium sanding dust from car body repairs.

## MAIN ADVANTAGES

- **Efficient:** The powerful GYS suction system achieves high suction levels with low air consumption.
- **ATEX certified:** suitable for using abrasives on aluminium car bodies.
- **Practical:** its two large Ø 150 mm wheels make it easy to move around the workshop.
- **Easy to use:** no maintenance required. No moving parts. No filter to clean.
- **Adjustable sanding pressure** and pressure gauge meaning this machine can be used with all types of commercial sanders.

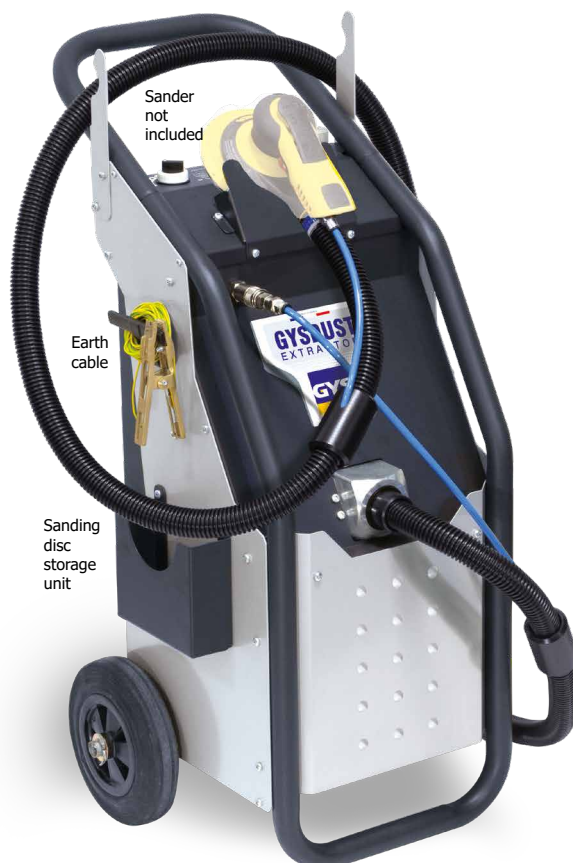

## ACCESSORIES INCLUDED



Earth clamp



Dust bag  
ref. 058880 (x5)



Hose 5 m | Ø 29 mm



ATEX norm  
Group II - Category 3



## CARACTÉRISTIQUES

Bag capacity	5 kg
Air flow	600 l/mn
Air consumption	340 l/mn
Suction power	1 150 mm H2O
Noise level	70 dB (A)
Hose dimensions	Ø 29 mm 5 m long

## OPTIONAL SANDER



**Pneumatic orbital sander  
with Ø 150 mm buffing pad  
MIRKA PRO S 650HP**  
ref. 071346